


Make Dimplex HPL 9S-TURW

Heating, cooling and domestic hot water preparation package

Heating water temperature [°C]

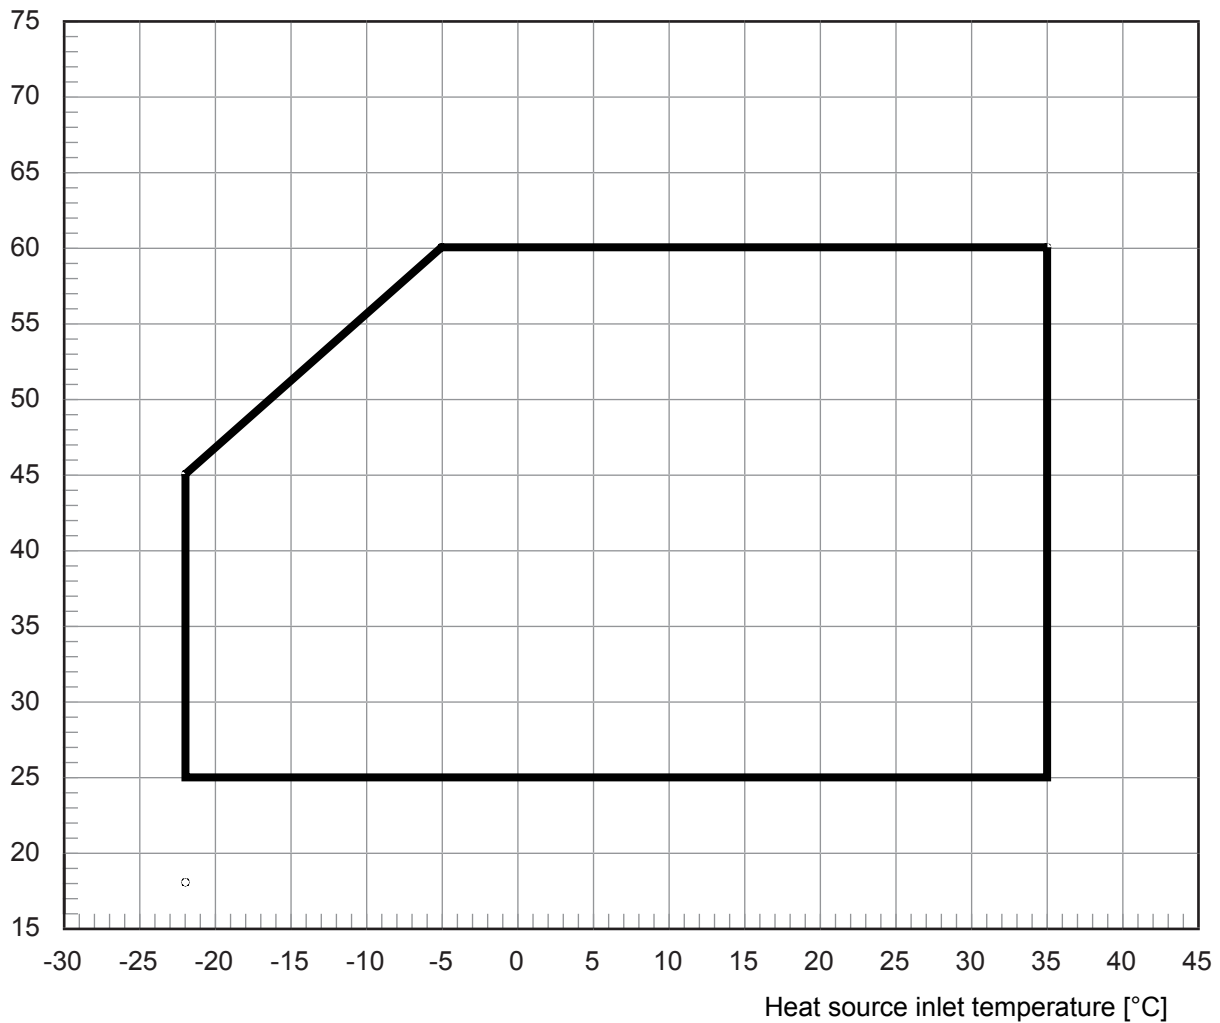

Note:  
 The maximum possible flow temperature and the operating limits vary by +/- 2K due to component tolerances.  
 The minimum volume flow specified in the device information must be ensured at the lower operating limit.  
 In mono energy operating mode with the heating element activated, the maximum flow temperature increases by approximately 3K.