

Medium-temperature air-to-water heat pump for installation close to walls

max. flow temperature: 65 °C
Casing colour: white aluminium

Medium-temperature air-to-water heat pumps for outdoor installation with external temperature controlled WPM 2006 plus heat pump manager. When mounting is done in an unprotected place, the air outlet must not be positioned against the main wind direction. Sound-optimised through the use of low-speed crescent wing axial-flow fans. Energy-efficient defrosting by reverse circulation. Universal design with optional DHW preparation and the option of flexible expansion for:

- Bivalent or bivalent-renewable operating mode
- Distribution systems with unmixed and mixed heating circuits

Integrated flow sensor and soft starter, return flow sensor and external temperature sensor included in the scope of supply.

Electric cable EVL ... to connect the heat pump and heat pump manager, must be ordered separately.



Technical data

Dimplex Medium-temperature air-to-water heat pump for installation close to walls (Medium temperature)	
Order reference	LA 9PS
Casing colour	white aluminium
max. flow temperature	65 °C
Lower operating limit heat source (heating operation) / Upper operating limit heat source (heating operation)	-25 to 35 °C
Heat output with 1 compressor / COP A-7/W35*	5,50 kW / 2,50
Heat output 1 compressor at A2/W35 / COP A2/W35*	7,00 kW / 3,10
Heat output with 1 compressor / COP A7/W35*	8,40 kW / 3,50
Heat output with 1 compressor / COP A10/W35*	9,50 kW / 3,90
Nominal consumption according to EN 14511 at A2/W35	2,30 kW
Sound power level device	62 dB (A)
Sound pressure level in 10 m	32 dB (A)
Refrigerant / Amount of refrigerant	R290 / 0,90 kg
Maximum heating water flow rate / Pressure drop	1,50 m³/h / 14500 Pa
Heat source flow min.	2000 m³/h
Dimensions (W x H x D)**	770 x 1320 x 660 mm
Weight	168 kg
Connection voltage	3/N/PE ~400 V, 50 Hz
Starting current with soft starter	28 A
Type of defrosting	Reverse circulation
Connection heating	1 Zoll

*Heat output and COP according to EN 14511 at A2/W35 (A2 = air intake temperature +2 °C, W35 = heating water outlet temperature +35 °C)

**Please note that additional space is required for pipe connections, operation and maintenance.

Description	Order ref.	Article number	Sample item	Item	Price
Heat pumps					
Medium-temperature air-to-water heat pump for installation close to walls	LA 9PS	340000	1		
10 m control line	EVL 996-1	321990	1		
20m control line	EVL 997-1	322000			
30m control line	EVL 998-1	322010			
40 m control line	EVL 999-1	359120			
DN 25 double-sphere rubber expansion joint	KOMP 25	362050			
DN 25 dirt trap	SMF 25	362130			
DN 32 dirt trap	SMF 32	362140			
Air-to-water heat pump connection kit	VSF 25	361790			
Hydraulic accessories					
1" connecting hose*	AS 976	322180			
Floor-mounted buffer tank (100 l)*	PSW 100	351090			
Floor-mounted buffer tank (200l)*	PSW 200	339830			
Universal buffer tank (500 l)*	PSW 500	339210			
Compact manifold with overflow valve	KPV 25	346590	1		
EB KPV extension module	EB KPV	348650			
Circulating pump for heating water	UP 60	340300	1		
Dual differential pressureless manifold	DDV 25	358390			
Hot water module / unmixed heating circuit module	WWM 25	346600			
Electronically regulated circulating pump for heating water	UPE 60	358870			
Manifold bar	VTB 25	339870			
Mixed heating circuit module with temperature sensor	MMH 25	348640			
Mixer module for bivalent systems	MMB 25	348880			
District heating lines with ready-to-use 90° bend*	HVL 25-50	358650			
District heating lines with ready-to-use 90° bend*	HVL 25-75	358660			
District heating lines with ready-to-use 90° bend*	HVL 25-100	358670			
District heating lines with ready-to-use 90° bend*	HVL 25-150	358880			
District heating lines with ready-to-use 90° bend*	HVL 32-150	358680			
District heating lines with ready-to-use 90° bend*	HVL 32-200	358690			
District heating lines with ready-to-use 90° bend*	HVL 32-250	358700			
Ready-for-use DN 32 stainless steel Wellflex pipe	VSE 32-50	362520			
Ready-for-use DN 32 stainless steel Wellflex pipe	VSE 32-100	362530			
Ready-for-use DN 32 stainless steel Wellflex pipe	VSE 32-150	362540			
Ready-for-use DN 32 stainless steel Wellflex pipe	VSE 32-200	362550			
Ready-for-use DN 32 stainless steel Wellflex pipe	VSE 32-300	362560			
Heating accessories					
Fan convector for heating 800 W	SRX 080M	359080			
Fan convector for heating 1200 W	SRX 120M	359090			
Fan convector for heating 1400 W	SRX 140M	359100			
Fan convector for heating 1800 W	SRX 180M	359110			
Fan convector for heating/cooling	HL 11C	351730			
Fan convector for heating/cooling	HL 16C	351740			
Fan convector for heating/cooling	HL 26C	351750			
Fan convector for heating/cooling	HL 36C	351760			
3 kW pipe heater	HCT 300	351210			
Immersion heater pipe assembly*	HDLR 450	337450			
DHW preparation accessories					
Hot water cylinder (300l) with temperature sensor*	WWSP 332	346610			
Hot water cylinder (400l) with temperature sensor*	WWSP 880	337880			
Design hot water cylinder with sheet metal coverings and temperature sensor*	WWSP 442E	353370			
400l solar cylinder for heat pump	WWSP 432 SOL	361080			
Hydro tower without regulation	HWK 332	362360			
Combination tank for heating and DHW preparation	PWS 332	348620	1		
CTHK 630 immersion heater, 4.5 kW, ~230 V	CTHK 630	363610			
immersion heater, 2.0 kW, ~230 V	CTHK 631	336180			
CTHK 632 immersion heater, 2.9 kW	CTHK 632	335910			
CTHK 633 immersion heater, 4.5 kW	CTHK 633	322140			
CTHK 634 immersion heater, 6.0 kW	CTHK 634	322150	1		

Description	Order ref.	Article number	Sample item	Item	Price
CTHK 635 immersion heater, 7.5 kW	CTHK 635	322160			
Flange heater for domestic hot water	FLH 60	338060			
Flange heater for domestic hot water	FLHU 70	338070	1		
FLH 25M flange heater	FLH 25M	349430			
Safety valve combination	SVK 852	326660			
Combo tank for heating and domestic hot water preparation with central flow*	PWD 750	349100			
Manifold bar	VTB 25	339870	1		
Hot water module / unmixed heating circuit module	WWM 25	346600	1		
Pump unit DN 25 for direct connection of the hot water cylinder	WPG 25	356030			
Circulating pump for heating water	UP 60	340300	1		
Control accessories					
Extension for an Ethernet network connection	NWPM	356960			
Extension for a KNX/EIB bus connection	EWPM	356970			
Extension for a Modbus connection	LWPM 410	339410			
Swimming pool / remote fault indicator relay module	RBG WPM	339700			
Remote control for WPM 2006/2007/EconPlus/R*	AP PGD	356570			
External temperature sensor with casing	FG 3115	336620			
Temperature sensor NTC-2 with metal sleeve	NTC-2M	363710			
Strap-on sensor	FA 550	338550			
Thermostat for heating and domestic hot water	KRRV 003	322070			


* Other specific accessories available / required

Important information:

The combination of the components and the quantities indicated represent a non-binding sample system, which needs to be tested and individually adapted as required. Pump dimensioning must be reviewed according to the pressure loss of the system and the minimum heating water flow rate of the heat pump.

Note:

The given hydraulic integration schematic is a schematic representation of the key components and serves as an aid for planning your customized system. The current status is available at all times under www.dimplex.de/nc/en/professional/online-planner/hydraulic-integrations.html. It does not contain all the required safety devices, the components needed to maintain constant pressure, or any other additional valves which may be required for maintenance and service work as stipulated by EN 12828. The heat pump manager settings and any external regulation system which may be connected must be adapted to the present integration diagram. Software updates may be required!

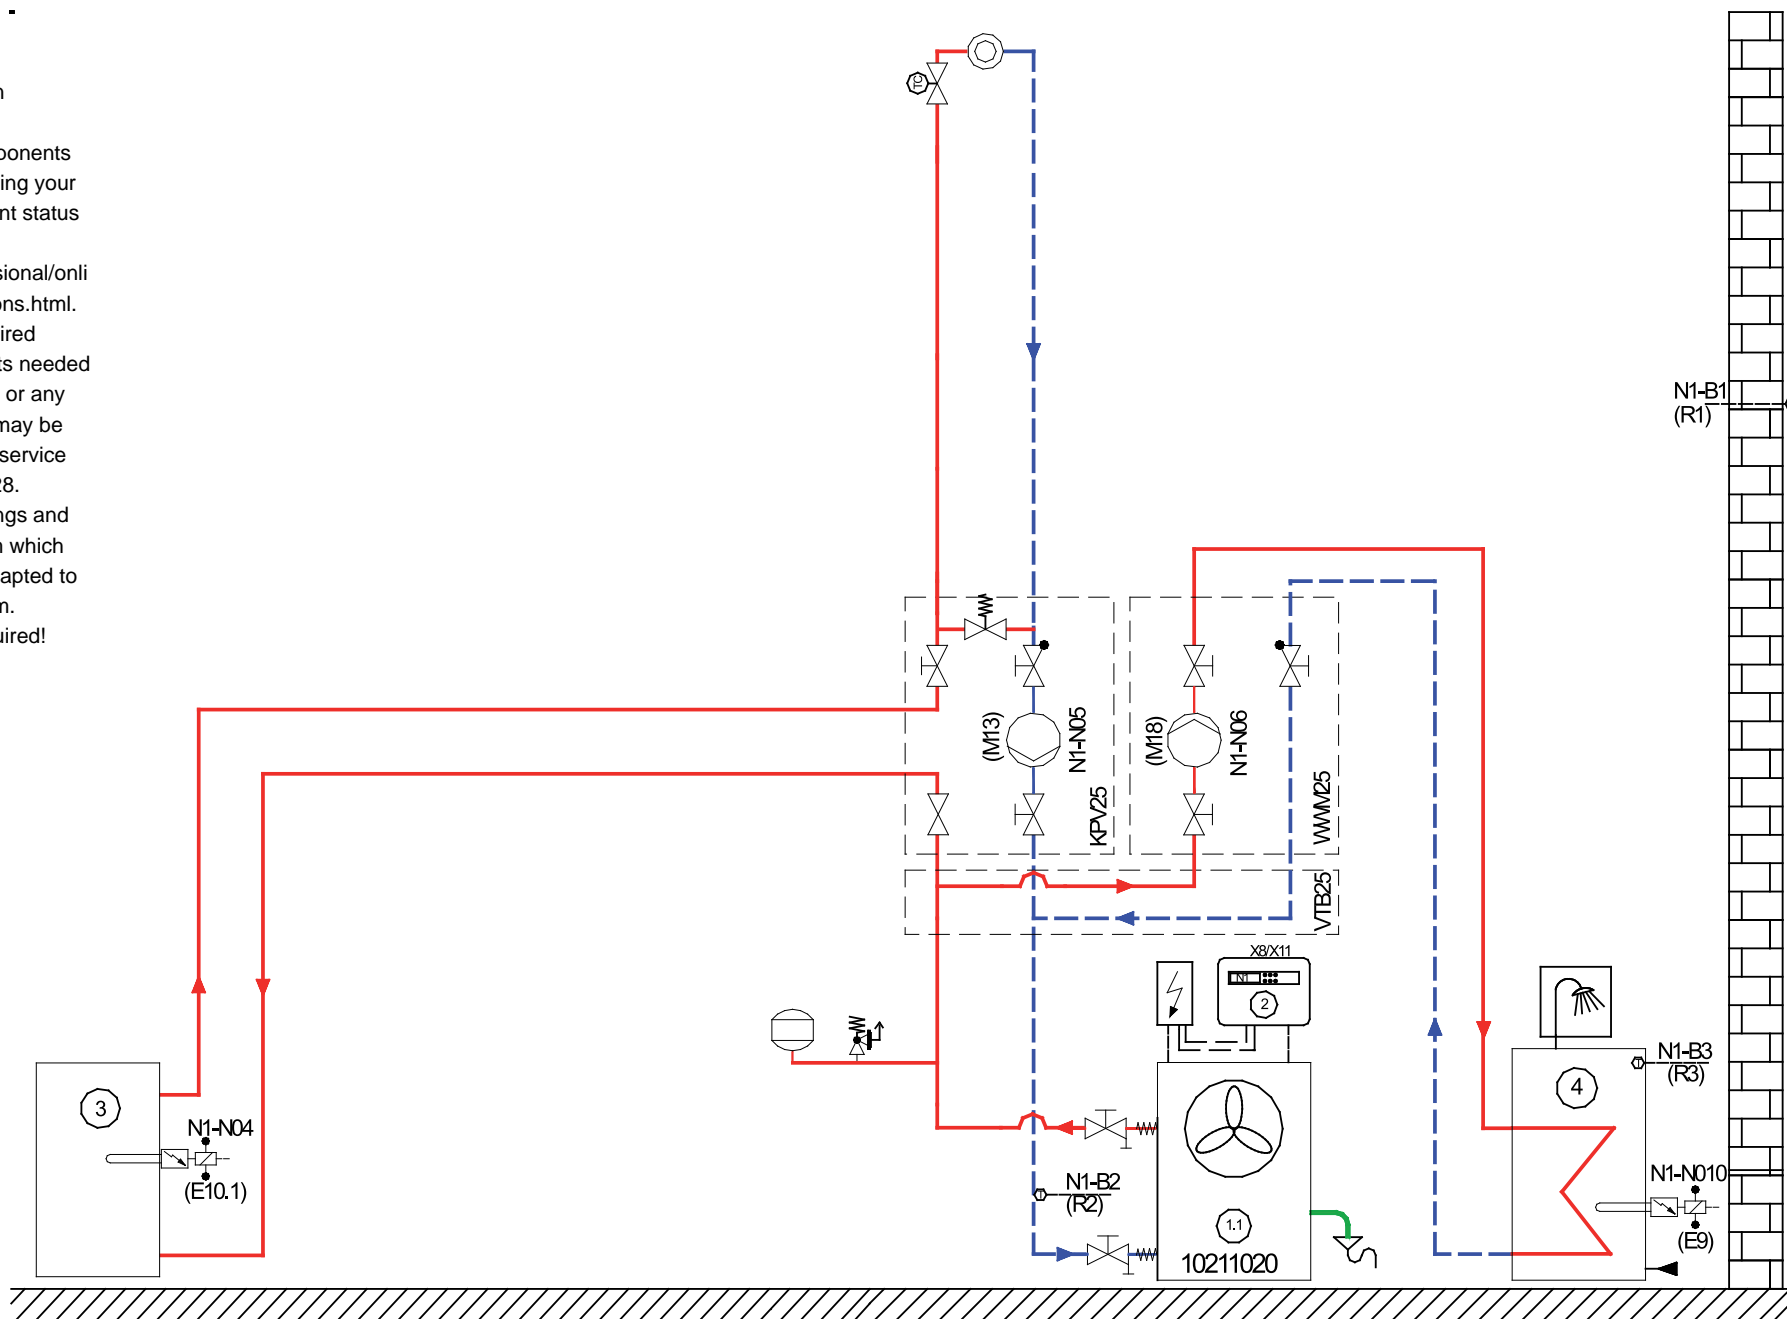

System description:

- Air-to-water heat pumps with defrosting by reverse circulation extract the energy required for defrosting from the heating system. In the case of air-to-water heat pumps, a buffer tank connected in series, into which the immersion heater is screwed, must be installed in the flow in mono energy systems to ensure defrosting. A dirt trap with a mesh size of between 0.6mm and 0.8mm is to be installed in order to protect the plate heat exchanger from larger dirt deposits. Clean the filter sieve of the dirt trap one day after start-up. These intervals can be extended as soon as no more impurities are detected. When the level of impurities is significantly high (e.g. due to corrosion found in the building), it is recommended that a sludge trap be installed in order to minimise the need for regular cleaning. A permanent corrosion process, caused by the entry of oxygen into the system, is characteristic of heating systems featuring open diffusion. This is best alleviated using an electrophysical anti-corrosion system. Condensate which forms during defrosting must be drained off without risk of frost. Acoustic emissions must be taken into account, and a free air circuit provided for, when the installation location is being selected. Heat pumps without weather-proof protective covers in particular need to be installed outdoors in such a manner that the air outlet is not positioned against the main wind direction.
- A buffer tank connected in series is recommended for heat pump heating systems, to ensure the minimum heat pump runtime of 6 minutes for all operating statuses.
- The heat pump supplies a large part of the required heat output. An electric heating element (immersion heater) supplements the heat pump on days when the external temperature lies below the bivalence point. In mono energy systems, the contactor for the immersion heater (E10.1) must be set according to the output. It is controlled (230 V AC) by the heat pump manager via terminals X1/N and J13/NO4.
- The heat exchanger in the hot water cylinder must transfer the maximum heat output at the maximum heat source temperature. In systems with high hot water consumption (multiple dwellings, industrial applications) the cylinder must be set to the maximum peak demand while taking the shut-off times into account. The maximum heat output and the maximum heating water flow must be adhered to!
- The contactor for the flange heater (E9) in the hot water cylinder should be dimensioned according to the output and must be supplied by the customer. It is controlled (230 V AC) by the heat pump manager via terminals X1/N and J16/NO10. The maximum heat output of the heat pump and the water flow are to be observed.
- When room temperature controllers are used, the heating element valves / thermostat valves can cause the volume flows in the consumer circuit to fluctuate. These volume flow fluctuations must be compensated for by an overflow valve installed in the heating bypass downstream from the unregulated heating pump main circuit (M13); this must be set by a technician.

Presettings:

Pre-configuration	Setting
Operating mode	Mono energy
Heating circuit 1	Yes
Heating circuit 2	No
DHW preparation	Yes
DHW preparation request by	Sensor
Domestic hot water preparation flange heater	Yes
Swimming pool water preparation	No

Legend:

1.	Heat Pump
1.1	Air-to-water heat pump
1.2	Brine-to-water heat pump
1.3	Water-to-water heat pump
1.4	Reversible air-to-water heat pump
1.5	Reversible brine-to-water heat pump
1.6	Reversible water-to-water heat pump
2.	Heat pump manager
3.	Parallel buffer tank
3.1	Buffer tank
4.	Hot water cylinder
5.	Swimming pool heat exchanger
6.	Passive cooling station with cooling controller N6
7.	Heating and silent or dynamic cooling
8.	Fan convector with 4-wire connection
9.	Cooling circuit only
10.	Heating circuit only
13.	Heat source
15.	Hydraulic tower
16.	Scalding protection
17.	Hydro tower HWK 332

Domestic hot water distribution system:

DDV 32	Dual differential pressureless manifold (up to 2.5 m ³ /h)*
EB KPV	Extension module for compact manifold (up to 2.0 m ³ /h)*
KPV 25	Compact manifold with overflow valve (up to 1.3 m ³ /h)* In combination with EB KPV (up to 2.0 m ³ /h)*
MMB 25	Mixer module, bivalent (up to 2.0 m ³ /h)*
MMH 25	Mixer module for heating circuit
VTB 25	Manifold bar (up to 2.5 m ³ /h)*
WWM 25	Hot water module / unmixed heating circuit (up to 2.5 m ³ /h)*

* Recommended max. heating waterflow

Solarthermics:

SST 25	Solar station for hot water
SOLK 1204	Collector field
SOLPU 1	Solar station
SOLCU 1	Solar controller
SOLCU 2	Solar controller
T1	Temperature sensor (collector sensor)
T2	Temperature sensor (cylinder 1)
T3	Temperature sensor (cylinder 2 /optional display function)

B3	Hot water thermostat
B4	Swimming pool thermostat
E9	Flange heater, hot water
E10	2nd heat generator (HG2)
E10.1	Immersion heater
E10.2	Oil/gas boiler
E10.3	Solid fuel boiler
E10.5	Solar energy system
F7	Safety temperature monitor
K20	Contactora for 2nd heat generator
K21	Contactora for immersion heater hot water
M11	Primary pump for heating operation
M12	Primary pump for cooling operation
M13	Heat circulating pump for main circuit
M14	Heat circulating pump for heating circuit 1
M15	Heat circulating pump for heating circuit 2
M16	Auxiliary circulating pump
M17	Cooling circulating pump
M18	Hot water circulating pump
M19	Swimming pool water circulating pump
M21	Mixer
N1	Heating controller
N2	Cooling controller for reversible heat pumps
N3/N4	Room climate control stations
N6	Cooling controller for passive cooling
N12	Solar controller
R1	External wall sensor
R2/2.1	Return flow sensor
R3	Hot water sensor
R4	Return flow sensor for cooling water
R5	Temperature sensor for heating circuit 2
R9	Flow sensor (antifreeze)
R11	Flow sensor for cooling water
R13	Sensor for heating circuit 3 / bivalent-renewable
SMF	Dirt trap
TC	Room temperature controller
Y5	Three-way distribution valve
Y6	Two-way valve
Y7	Three-way mixing valve
Y8	Three-way valve (closing time max. 10 sec.)
Y12	External 4-way reversing valve