

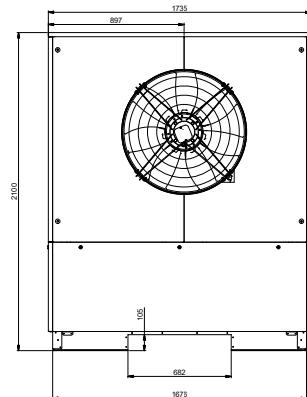
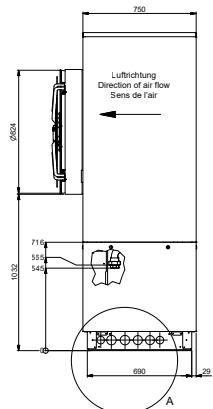
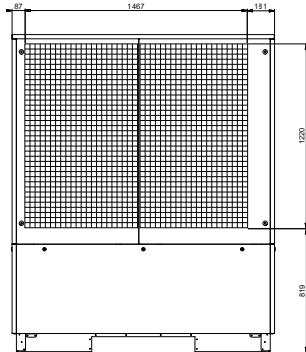


LA 40TU-2

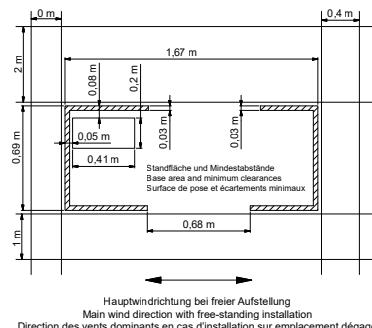

Ringschrauben für Krantransport nach Aufstellung ausschrauben!
Remove eyebolts for crane transport after set-up!


Après installation, dévisser les anneaux de levage servant au grutage !

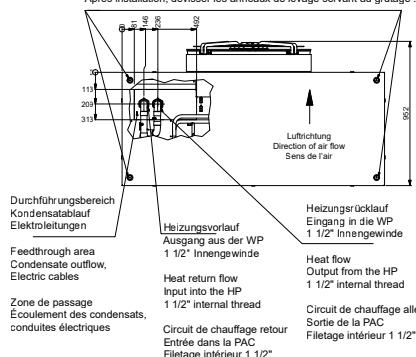

Legende Option seitliche Anschlüsse:
Legend - optional side connections:
Légende raccordements latéraux en option :

- ① Heizungsvorlauf Ausgang aus der WP
Heat flow output from HP
1 1/2" external thread
- ② Heizungsrücklauf Eingang in die WP
Heat return flow input into HP
1 1/2" external thread
- ③ Durchführbereich Kondensatablauf
Feedthrough area for condensate outflow
- ④ Durchführbereich Elektroleitungen
Feedthrough area for electric cables

- Heat flow output from HP
1 1/2" external thread
- Circuit de chauffage retour, entrée dans la PAC
Filetage extérieur 1 1/2"
- Passage de la conduite d'écoulement des condensats
- Passage des conduites électriques

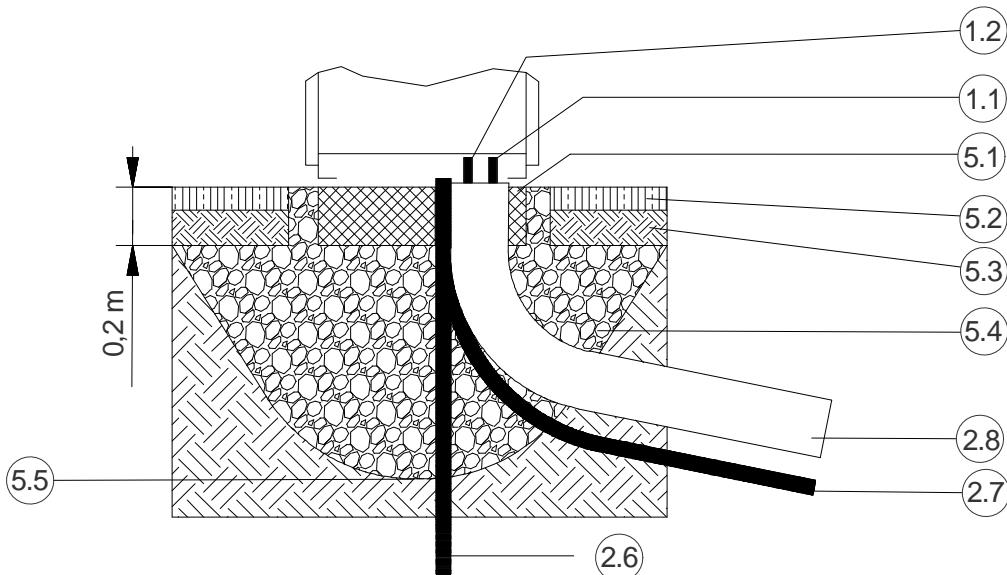

Glen Dimplex Thermal Solutions
(Glen Dimplex Deutschland GmbH)
Am Goldenen Feld 18
D-95326 Kulmbach

T: + 49 9221 709-100
F: + 49 9221 709-339
dimplex@dimplex.de
www.dimplex.de

Glen Dimplex Austria GmbH
Hauptstraße 71
A-5302 Henndorf am Wallersee

T: + 43 6214 20330
F: + 43 6214 203304
info@dimplex.at
www.dimplex.at

LA 40TU-2

1. Hydraulic connections

- 1.1 Flow
- 1.2 Return
- 1.11 Flow (optional)
- 1.21 Return (optional)
- 1.3 Domestic hot water flow
- 1.4 Hot water return
- 1.5 Heat source flow
- 1.6 Heat source return
- 1.7 Filling and drain cock
- 1.8 Combined heating/domestic hot water return

2. Feed-throughs/pipes

- 2.1 Feed-through - condensate pipe
- 2.2 Feed-through - electric wire
- 2.11 Feed-through condensate pipe (optional)
- 2.21 Feed-through electric wire (optional)
- 2.5 Condensate drain
- 2.6 Condensate pipe
- 2.7 Electric empty conduit
- 2.8 District heating pipe

3. Transport/operation

- 3.1 Ring bolt for crane transport
- 3.2 Transport tunnel
- 3.3 Transport opening for carrier pipe
- 3.4 Operator side

4. Air circuit

- 4.1 Direction of air flow
- 4.2 Main wind direction with free-standing installation
- 4.3 Air inlet
- 4.4 Air outlet
- 4.31 Air inlet (optional)
- 4.41 Air outlet (optional)

5. Foundation

- 5.1 Foundation
- 5.2 Green field
- 5.3 Earth
- 5.4 Layer of gravel
- 5.5 Frost line
- 5.6 Contact surface floor frame (all-round)



Glen Dimplex Thermal Solutions T: + 49 9221 709-100
(Glen Dimplex Deutschland GmbH) F: + 49 9221 709-339
Am Goldenen Feld 18 dimplex@dimplex.de
D-95326 Kulmbach www.dimplex.de

Glen Dimplex Austria GmbH T: + 43 6214 20330
Hauptstraße 71 F: + 43 6214 203304
A-5302 Henndorf am Wallersee info@dimplex.at
www.dimplex.at

LA 40TU-2

Notes:

The condensate pipe must lead to the drainage facilities. The frost line can vary according to the climatic region.

The regulations of the countries in question must be observed. For unprotected free-standing installation, heat pumps without deflector hoods must be installed at right angles to the main wind direction.

Depending on the heat pump type, not all points of the legend are included in the drawing.



Glen Dimplex Thermal Solutions T: + 49 9221 709-100
(Glen Dimplex Deutschland GmbH) F: + 49 9221 709-339
Am Goldenen Feld 18 dimplex@dimplex.de
D-95326 Kulmbach www.dimplex.de

Glen Dimplex Austria GmbH T: + 43 6214 20330
Hauptstraße 71 F: + 43 6214 203304
A-5302 Henndorf am Wallersee info@dimplex.at
 www.dimplex.at